

**tecnica**

CM2000

CAVETTATRICE DOPPIA AUTOMATICA PER PERSIANE CON CONTACAVE
 DOUBLE AUTOMATIC SLOT-CUTTING MACHINE FOR DOOR AND WINDOW-SHUTTERS
 PIQUEUSE DOUBLE AUTOMATIQUE POUR PERSIENNES

Questa macchina consente l'esecuzione del passo della cremagliera.

This machine permits the execution of the rack pitch. / Cette machine permet d'exécuter le pas de la crémaillère.

MACCHINE LAVORAZIONE LEGNO - WOODWORKING MACHINERY



- ROBUSTA - MINIMO INGOMBRO - VELOCE - FACILE MESSA A PUNTO
- LAVORA DUE MONTANTI CONTEMPORANEAMENTE
- DISTANZE DI INIZIO E FINE LAVORI REGOLABILI
- TASTO A FUNGO PER ARRESTO DI EMERGENZA
- ARRESTO AUTOMATICO A FINE LAVORO
- LIBRETTO ISTRUZIONI
- CHIAVI DI SERVIZIO
- CONTACAVE A UN OROLOGIO

**DATI TECNICI**

Completa di cavalletti e cremagliere passo standard	27 - 36 mm
Volt	230/400 HZ 50/60
Inclinazione	20° - 45°
Profondità cave	0 - 20 mm
Lunghezza massima cave	0 - 120 mm
Dimensione max. montanti in legno	100 x 110 mm
Dimensione min. montanti in legno	20 x 40 mm
Motore	HP 3
Velocità mandrini	9600 giri/min
Attacco mandrini	diametro 10 mm
Peso netto	340 Kg circa

OPTIONALS

- Cremagliera passo standard 27-36 mm
- Cremagliere a passo speciale doppio
- Cremagliere a passo speciale
- Contacave a un orologio

I dati tecnici e caratteristiche non sono impegnativi



- STURDY - MINIMUM ENCUMBRANCE - FAST AND EASY MAINTENANCE
- EXECUTES WORK CYCLE ON TWO WINDOW POSTS SIMULTANEOUSLY
- DISTANCE BETWEEN BEGINNING AND END OF WORK CYCLE IS ADJUSTABLE
- MUSHROOM SHAPED PUSH-BUTTON FOR EMERGENCY STOPPING
- AUTOMATIC STOP AT END OF WORK CYCLE
- INSTRUCTIONS BOOKLET
- SERVICE SPANNERS
- SLOT COUNTER


TECHNICAL DATA

Complete with stands and standard pitch racks	27 - 36 mm
Volt	230/400 HZ 50/60
Tilting	20° - 45°
Slots depth	0 - 20 mm
Max length of the slots	0 - 120 mm
Max dimension of the wood column	100 x 110 mm
Min dimension of the wood columns	20 x 40 mm
Motor	HP 3
Spindles speed	9600 rpm
Spindles coupling	diameter 10 mm
Net weight	340 Kg

OPTIONALS

- Standard pitch rack 27-36 mm
- Double special pitch racks
- Special pitch racks
- Slot counter

Technical data and characteristic are not difficult

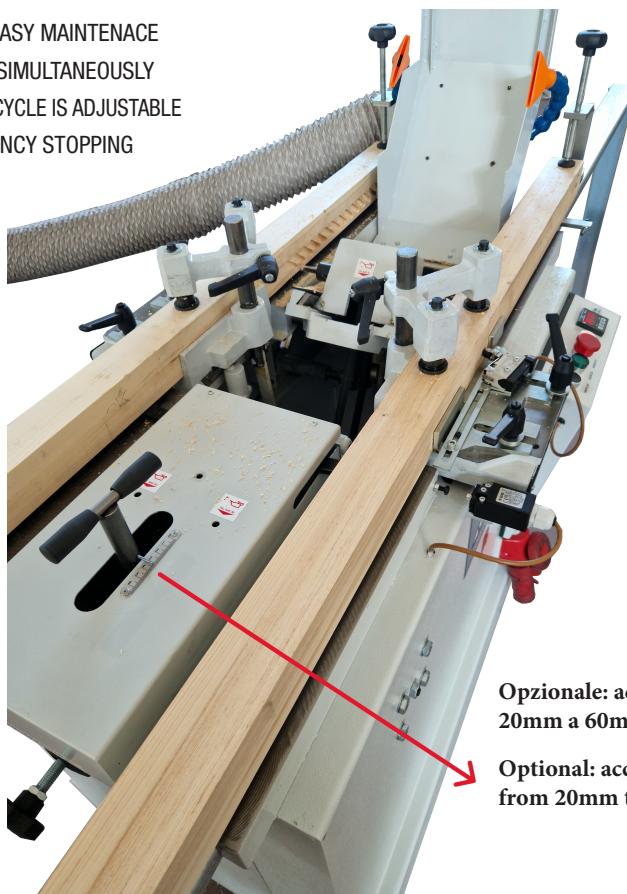

Opzionale: accessorio per passi multipli da 20mm a 60mm

Optional: accessory for multiple pitches from 20mm to 60mm